


# Combined building entry for gas for buildings with a basement

## HSB SKIBFGT-PESS-PE100-TE DN150 BL1630

Article no.: 1990802010, GTIN: 4052487054591

Combined building entry for gas manufactured by Schuck, DN 150, for use in core drills or wall sleeves ID 250 mm in buildings with a basement.

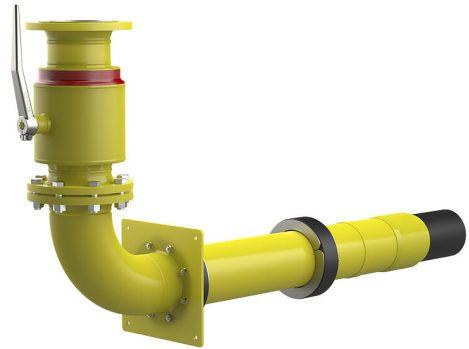

Picture may differ from selected product

## FACTS

### Advantages:

- Can be installed easily and quickly on-site
- Dry installation

### Scope of delivery:

- 1 piece Combined building entry for gas manufactured by Schuck, DN 150, includes protection against pulling out and twisting and pre-assembled sealing elements

### Dimensions:

- Core drill/wall sleeve ID: 250 mm
- Infinitely adjustable for wall thicknesses 240 - 700 mm

### Application range:

- Waterproof concrete stress class 1, waterproof concrete stress class 2

## Material:

- Seal insert: stainless steel V2A (AISI 304L)
- Rubber: EPDM

## Tightness:

- gastight and watertight to 1.0 bar

## PICTURES

