

BD-Fix with foil flange

Slab entry


BDFF160 KG2000

Article no.: 3030400300, GTIN: 4052487231343



- **Ready for installation in the slab**

For connecting KG/HT pipes. Gastight and watertight connection to the slab thanks to integrated water barrier flange. With foil flange for connection to a bituminous thick coating, weldable sheet or vapour barrier.

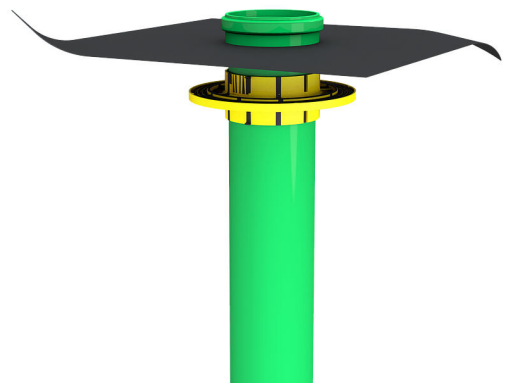

Picture may differ from selected product

FACTS

Advantages:

- Easy connection of the seal or vapour barrier by means of foil flange
- No interruption of the waste water pipe system
- radon tight

Application range:

- DIN 18533 W1-E
- Waterproof concrete stress class 1, waterproof concrete stress class 2

Material:

- KG pipe: PVC-U/KG 2000 pipe: PP
- Water barrier flange: ABS/TPE
- Foil flange: EPDM



Tightness:

- Pressure tight up to 5,0 bar \triangleq 50 m water column
- radon tight

FEATURES

| | |
|-----------------------------------|--------|
| Suitable for medium pipe OD (mm): | 160 |
| Type: | KG2000 |
| Packing unit: | 1 |