

# Fixed/loose flange wall sleeve made from stainless steel

for retrofit dowelling for black tank according to DIN 18533

FLFA1x400/80/0 DIN18533 A2

Article no.: 2500400009, GTIN: 4052487062404

For dowelling with wall sleeves, core drills or breakthroughs.



Picture may differ from selected product

## FACTS

### Advantages:

- Tailor-made designs can also be produced
- Also available with multiple entries and in a variety of diameters

### Scope of delivery:

- 1 piece Fixed/loose flange wall sleeve
- Bolts and nuts M20 (DIN 18533)
- Fastenings for concrete

## Dimensions:

- Standard fixed flange  $\varnothing a$  equal to the relevant wall sleeve  $\varnothing i$  + approx. 330 mm (for one passage)
- Standard upper length: 80 mm

## Application range:

- DIN 18533 W2.1-E, DIN 18533 W2.2-E

## Material:

- Fixed/loose flange wall sleeve: stainless steel V2A (AISI 304L) or V4A (AISI 316L)
- Fastenings: stainless steel V4A (AISI 316L)
- Closing cover: PE


## Tightness:

- gastight and watertight

## FEATURES

|                                       |     |
|---------------------------------------|-----|
| Wall sleeve ID (mm) D1:               | 400 |
| Fixed flange OD (mm) D2:              | 730 |
| Loose flange OD (mm) D3:              | 720 |
| Wall sleeve wall thickness (mm)<br>S: | 3   |

## PICTURES

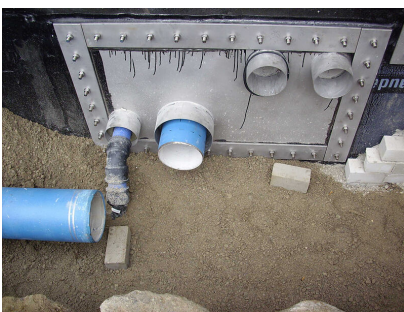

## ACCESSORIES REQUIRED



Rubber inlays